


DOCUMENTATION TECHNIQUE

ÉTRIER TARAUDÉ

Acier S355J2

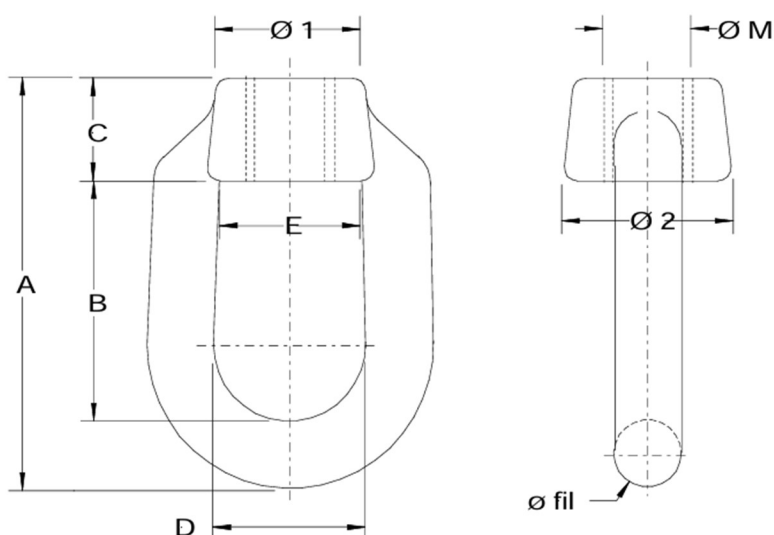

N°	Ø M*	Ø Fil	A	B	C	D	E	Ø 1	Ø 2	CMU en T	CR en T	PU en Kg
0	10	8	52	30.5	13	18	16.5	18	21	0T2	1T	0.065
0	12	10	64	38	15	25	23	25	28	0T5	2T5	0.135
1	14	12	80.5	47	20	29.5	26.5	31	34.5	0T8	4T	0.280
2	16	15	92	54	23	34.5	32	33	38	1T2	6T	0.400
3	20	17	104	62	25	37	33	36	43	1T8	9T	0.500
4	22	20	116	70	28	43	40	46	51	2T2	11T	0.840
4B	24	22	132	78	32	49	43	48	55	3T	15T	1.170
5	30	24	149	89	37.5	53	48	53	60	4T	20T	1.590
5B	36	27	165	95	40	57	51	57	68	5T	25T	2.150

* Taraudages standards (autres taraudages possibles sur demande)

Codification articles R. Rose

<u>Étrier taraudé</u>	ETT
Finition	G – Zingué N – Noir
Modèle	N°
Calibre	Ø M

Ex : Étrier taraudé zingué Ø 16
= ETTG2M16