


# TIGE À CHAPE MÂLE À SERTIR

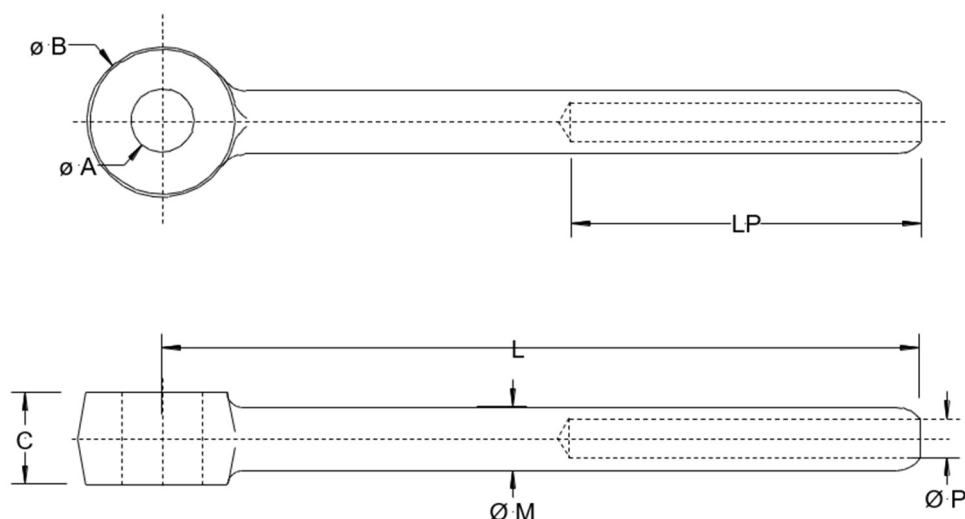

| Ø TIGE | Pour Câble de Ø | Ø A | Ø B | C  | L   | Ø P | LP  | CMU en T | CR mini |
|--------|-----------------|-----|-----|----|-----|-----|-----|----------|---------|
| 10     | 5               | 10  | 20  | 13 | 118 | 6   | 50  | 0T625    | 2T5     |
| 12     | 6               | 12  | 24  | 15 | 142 | 7   | 50  | 0T825    | 3T3     |
| 12     | 7               | 12  | 24  | 15 | 142 | 8   | 50  | 0T825    | 3T3     |
| 14     | 8               | 14  | 28  | 18 | 164 | 9   | 65  | 1T3      | 5T2     |
| 16     | 9               | 16  | 32  | 20 | 194 | 10  | 70  | 1T5      | 6T      |
| 20     | 10              | 20  | 40  | 25 | 225 | 11  | 80  | 2T5      | 10T     |
| 20     | 11              | 20  | 40  | 25 | 225 | 12  | 90  | 2T5      | 10T     |
| 24     | 12              | 24  | 48  | 29 | 260 | 13  | 95  | 3T75     | 15T     |
| 24     | 13              | 24  | 48  | 29 | 260 | 14  | 100 | 3T5      | 14T     |
| 24     | 14              | 24  | 48  | 29 | 260 | 15  | 100 | 3T25     | 14T     |
| 27     | 16              | 27  | 54  | 32 | 277 | 17  | 115 | 4T       | 16T     |
| 30     | 18              | 30  | 60  | 36 | 304 | 19  | 135 | 5T       | 20T     |
| 30     | 20              | 30  | 60  | 36 | 304 | 21  | 140 | 4T25     | 17T     |

Codification articles R. Rose

|                                   |                       |
|-----------------------------------|-----------------------|
| <u>Tige à chape mâle à sertir</u> | CHAMS                 |
| Finition                          | G – Galva<br>N – Noir |
| Modèle                            | Ø Tige                |
| Pour câble de Ø                   | / + câble de Ø        |

Ex : Tige à chape mâle à sertir galva  
Ø 14 pour câble de Ø 8  
= CHAMSG14/8