


DOCUMENTATION TECHNIQUE

TIGE À SERTIR

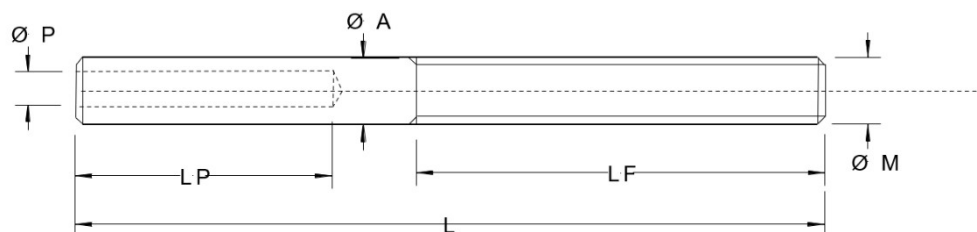

Ø Tige A	Pour Câble de Ø	Ø M	PAS	L	LF	Ø P	LP	CMU en T	CR mini	PU en Kgs
10	5	10	150	130	75	6	50	0T625	2T5	0.080
12	6	12	175	140	75	7	50	0T825	3T3	0.115
12	7	12	175	140	75	8	50	0T825	3T3	0.115
14	8	14	200	185	85	9	65	1T3	5T2	0.200
16	9	16	200	215	90	10	70	1T5	6T	0.310
20	10	20	250	270	120	11	80	2T5	10T	0.610
20	11	20	250	270	120	12	90	2T5	10T	0.600
24	12	24	300	310	145	13	95	3T75	15T	0.980
24	13	24	300	310	145	14	100	3T5	14T	0.965
24	14	24	300	310	145	15	100	3T25	13T	0.950
27	16	27	300	350	170	17	115	4T	16T	1.350
30	18	30	350	410	190	19	135	5T	20T	1.850
30	20	30	350	410	190	21	140	4T25	17T	1.800
32	20	30	350	410	190	21	140	5T5	22T	1.950
35	22	35	350	430	200	23	160	6T5	26T	2.610
40	26	40	400	450	240	27	180	8T	32T	3.450

Codification articles R. Rose

Tige à sertir	TIS
Types	D – Droite G – Gauche
Finition	G – Galva N – Noir
Modèles	Ø Tige A
Pour câble de	/ + Pour Câble de Ø

Ex : Tige à sertir gauche galva
Ø 32 pour câble de Ø 20
= TISGG32/20