


TIGE À SOUDER

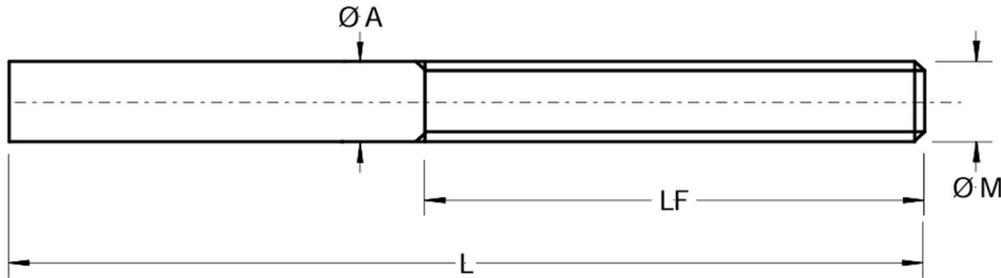

Ø Tige A	Ø M	PAS	L	LF	CMU en T	CR mini	PU en Kgs
8	8	125	98	60	0T24	1T2	0,040
10	10	150	110	65	0T4	2T	0,100
12	12	175	115	90	0T58	2T9	0,130
14	14	200	135	90	0T8	3T	0,210
16	16	200	155	100	1T08	5T4	0,310
18	18	250	175	100	1T5	7T5	0,420
20	20	250	210	120	1T8	9T	0,580
22	22	250	230	125	2T5	12T5	0,750
24	24	300	245	145	2T8	14T	0,750
27	27	300	265	155	3T5	17T5	1,300
30	30	350	280	180	4T5	22T5	1,960
35	35	350	325	200	5T3	26T5	2,230
40	40	400	375	245	7T5	37T5	4,100

Codification articles R. Rose

Tige à souder	TI
Types	D – Droite G - Gauche
Finition	G – Galva N – Noir
Calibre	Ø Tige M

Ex : Tige à souder gauche
noir Ø 14
= TIGN14