


MANILLE AFNOR



Piton à œil

DROITE NORME 33 330
LYRE NORME 33 344

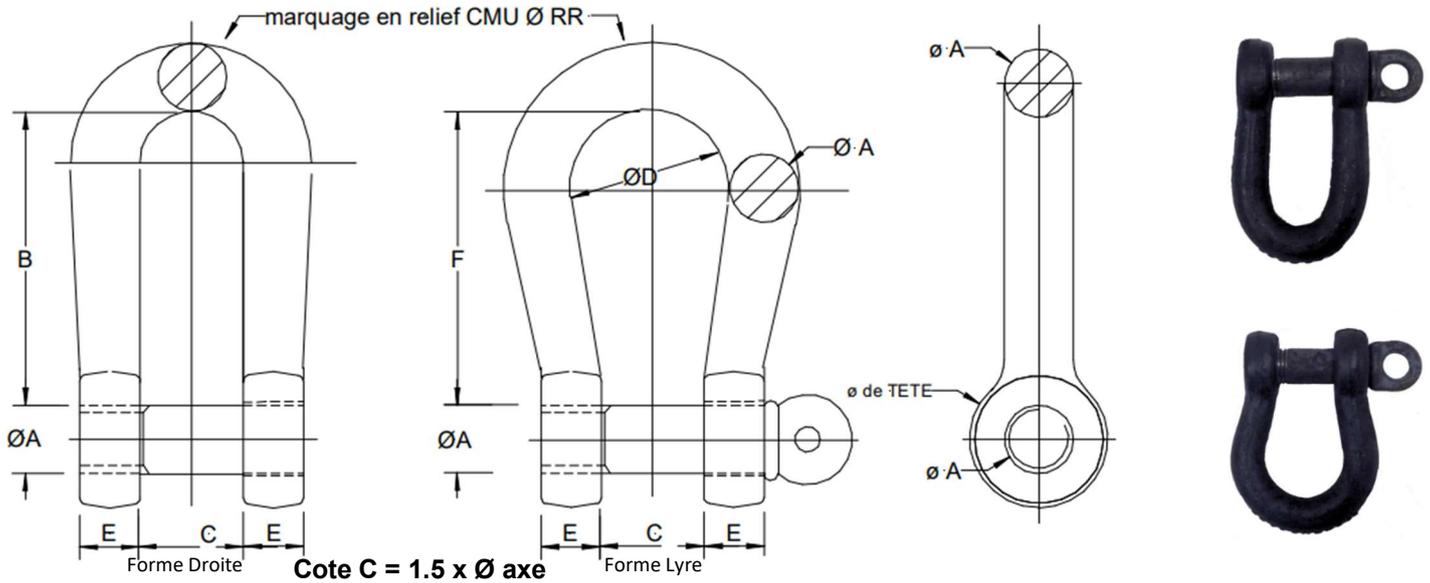

A boulon
A PARTIR DU Ø 10

DROITE NORME 33 336
LYRE NORME 33 346



Axe tête cylindrique

A goupille
A PARTIR DU Ø 10

DROITE NORME 33 334

Calibre A	B	C	Ø D	E	F	Ø Tête	CMU	CR mini	PU en Kgs Droite	PU en Kgs Lyre
6	21	9	15	6	25	12	0T16	0T96	0.025	0.030
8	30	12	19	8	29	16	0T25	1T5	0.055	0.065
10	36	15	23	9	36	20	0T4	2T4	0.105	0.115
12	44	18	28	11	43	24	0T63	3T78	0.180	0.215
14	47	21	32	12	50	28	0T8	4T8	0.290	0.350
16	58	24	37	14	55	32	1T	6T	0.455	0.530
18	61	27	41	16	53	36	1T25	7T5	0.635	0.710
20	67	30	44	18	64	40	1T6	9T6	0.860	1.010
22	74	33	49	19	71	44	2T	12T	1.120	1.260
24	81	36	53	21	77	48	2T5	15T	1.520	1.600
27	91	41	60	24	88	54	3T15	18T9	2.150	2.420
30	100	45	66	26	97	60	4T	24T	2.830	3.230
33	105	50	72	29	102	66	5T	30T	3.700	4.250
36	113	54	80	32	113	72	6T3	37T8	4.800	5.700
39	129	59	86	34	123	78	7T1	42T6	6.000	7.100
42	146	63	93	37	139	84	8T	48T	7.000	6.500
45	153	68	99	40	147	90	10T	60T	9.000	9.000
48	157	72		42		96	11T2	67T2	11.000	

Codification articles R. Rose

Manille AFNOR	MA
Types	D - Droites L - Lyres
Axes	PO - Piton à œil
	B - À boulon
	TCY - Tête cylindrique à goupille
Finitions	N - Noir G - Galva Z - Zingué
Calibres	Ø Axes
Options (pour manilles boulonnées)	Goup + Ø Goupilles

Ex : Manille Afnor Droite à boulon noir Ø24
= MADB24